



PRODUCT

磐石涂料

Glamours paint

SGS



PS

独家水磨石纹理

Exclusive terrazzo texture

磐石涂料是一种使用镭刀施工、免喷涂的工艺效果,表面具有独家的水磨石效果
我们提供两种搭配方案,通过均匀的粗细片状石块来呈现表面的纹理
更配有多种彩色片状石块配色方案可选,效果更佳

Glamours paint is a trowel-applied, no-spray process effect with an exclusive terrazzo effect surface. We offer two matching options to present the surface texture through uniformly coarse and fine flake stones, and a variety of coloured flake stone colour schemes to choose from for an even better effect.



色彩系统 Colour System

产品代码

产品色号

磐石 - PS01

实色

Product Code

Color Code

PS 01

Soild color

物理特性 PHYSICAL PROPERTIES

密度	Density	$1.7 \pm 1\text{g/cm}^3$	$1.7 \pm 1\text{g/cm}^3$
水溶性介质	sd (H2O)	0.02 m	0.02 m
pH 值	pH-value	8-10	8-10
漆膜干燥时间(表面)	Drying time	>2h(25-30°C)	>2h(25-30°C)
重涂时间/涂刷层	Recoating time	>4h(25-30°C)	>4h(25-30°C)
使用寿命	Service life	30 年 (长期稳定)	30 years

扩展信息 Extended Information



磐石TDS



施工教程



全景体验

 具有防酸抗碱特性
Acid and alkali resistance


 耐污瓷釉面漆
Stain-resistant enamel finish



磐石 - PS25

磐石施工顺序示意图

Glamours paint Construction Methods

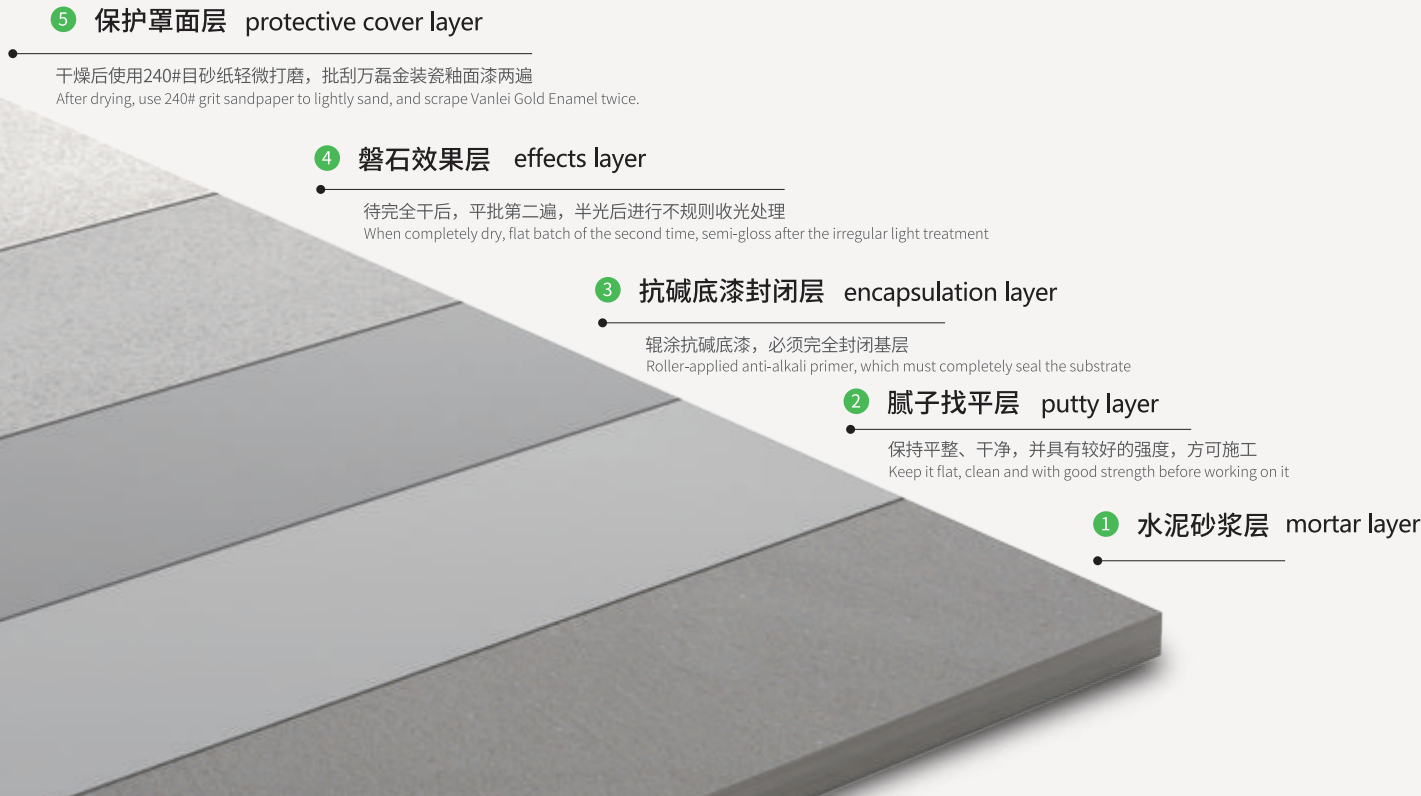




抗UV紫外线, 色彩稳定
UV resistant and colour stable



高延展性, 100%稳定均匀批刮性能
Highly ductile, 100% stable and uniform scribing properties

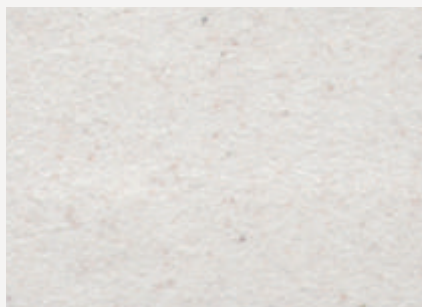


磐石 - PS01




磐石 - PS02




磐石 - PS03

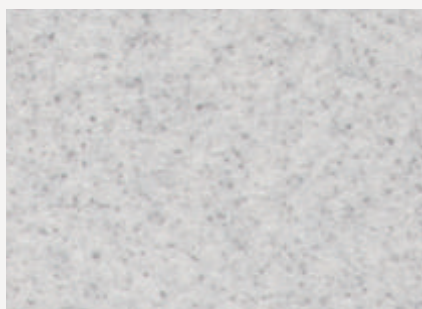

磐石 - PS04

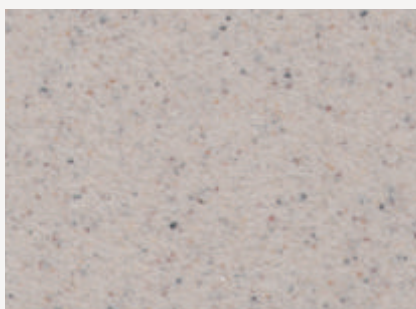


磐石 - PS05

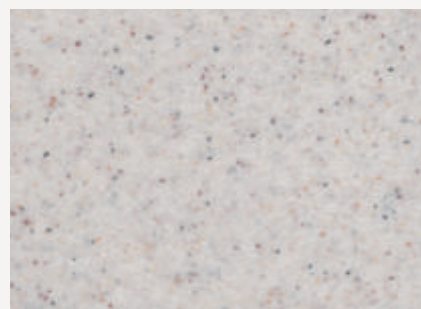

磐石 - PS06



磐石 - PS07

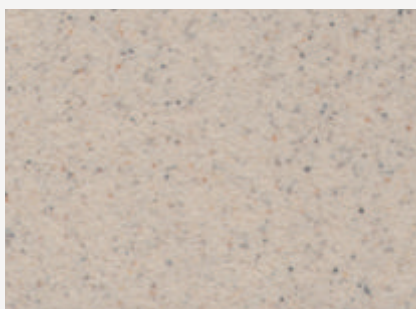


磐石 - PS08



磐石 - PS09



磐石 - PS10

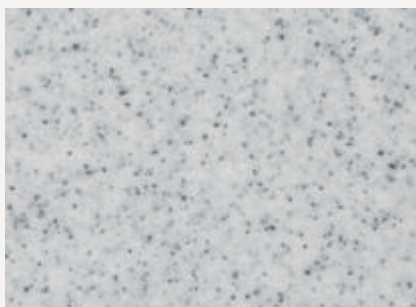

磐石 - PS11



磐石 - PS12

色卡颜色与实际材料颜色有少许差异纯属正常, 请谅解。

Colour card colour and the actual material colour a little difference is normal, please understand.



金装瓷釉罩面 长达30年的持续耐候性能

Gold enamel cover
30 years of continuous weathering

金装瓷釉罩面漆，是一款采用最新一代25纳米超细粒径的日化级硅丙乳液，通过无机皂化反应，结合万磊最新技术复配而成的罩面漆，它膏状的外观，顶级的致密性，超强的抗污能力，配合万磊磐石涂料，能达到舒缓柔和的柔光效果。

它的耐候性佳，耐污性强，出色抗刮性能，手感滑腻，可应用于建物外墙、围墙、室内墙面、电视墙。

Porcelain enamel overcoat paint is an overcoat paint made of the latest generation of 25nm ultra-fine particle size daily grade silicone propylene emulsion, through inorganic saponification reaction, combined with the latest technology of Vanlei, it has a paste-like appearance, top denseness, superb stain resistance, and with the Vanlei Glamours paint, it can achieve a soothing and soft soft light effect.

It has good weather resistance, strong stain resistance, excellent anti-scratch performance, smooth feel, and can be applied to building exterior walls, fences, indoor walls, TV walls.






绝佳30年耐候性能
Acid and alkali resistance



隔水效果, 0色差
Stain-resistant enamel finish

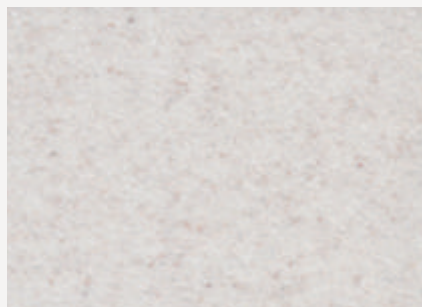


磐石 - PS13



磐石 - PS14



磐石 - PS15

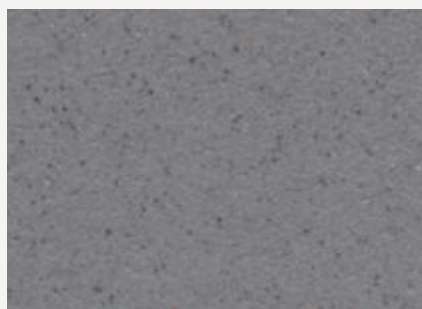

磐石 - PS16



磐石 - PS17



磐石 - PS18



磐石 - PS19



磐石 - PS20



磐石 - PS21



磐石 - PS22



磐石 - PS23



磐石 - PS24

磐石涂料
秦砖汉瓦，盛赞一曲
最美不过中国风



磐石涂料 GLAMOURS PAINT

磐石涂料是以特殊高分子防水树脂所制成的水性涂料，只需要不锈钢批刀施工，不用喷涂，也不会造成飞溅污染。同时，万磊磐石是属于水性环保涂料，主要采用树脂成分，与各种彩色片状石块天然石粉配制而成，因此延展性佳、不会有热胀冷缩的问题。

Glamours Paint is a water-based coating made of special polymer waterproofing resin, which requires only a stainless steel batch knife for construction, without spraying, and will not cause splash pollution. At the same time, Vanlei Glamours Paint is a water-based environmentally friendly coating, which is mainly made of resin and natural stone powder with various coloured flakes, so it has good ductility and does not have the problem of thermal expansion and contraction.

CN

主要成分

纳米级丙烯酸乳液、纳米碳酸钙粉、纯净水、天然彩砂、天然粘土

适用范围:室内, 室外, 墙面装饰使用

配套体系:全效透明渗透底漆 (根据实际情况分为吸收性/非吸收性介质基底) + 磐石涂料 + 金装瓷釉面漆

产品重量:磐石涂料净重:25kg/桶 金装瓷釉面漆净重:18/kg桶

色系选择:实色, 预制色, 可以根据来样调整

配套工具:羊毛辊筒、不锈钢批刀

预处理基材

- 1、基材表面:清除表面灰尘, 油腻和不牢固的瓷砖等, 如果有孔隙和裂缝要修补, 确保基材表面必须牢固、清洁干燥平整
- 2、确保预涂基材表面湿度小于10%, PH值小于10
- 3、辊涂一遍或两遍底漆 (渗透底漆) 兑水10-15%使用

基面要求

- ① 建议选用优质耐水腻子粉作为找平材料
- ② 基层应平整、干净, 并具有较好的强度, 方可施工
- ③ 旧墙翻新: 铲平基层, 清除松动的表层部分, 清洁粉尘油垢等杂质后方可施工
- ④ 配套底漆: 腻子有轻微掉粉时, 建议打磨后使用万磊专属的配套底漆

执行标准:GB 18582-2020《建筑用墙面涂料中有害物质限量》
GBT 9779-2015《厚浆型复层建筑涂料》

保质期:常温干燥状态下12个月(原装出厂时)

EN

Ingredient

Nano grade acrylic emulsion, nano calcium carbonate powder, pure water, Natural coloured sand, natural clay

Scope of application:Indoor, outdoor, decorative wall use

Complementary system

Full Clear Penetrating Primer (divided into absorbent/non-absorbent media substrates as appropriate) +Glamours Paint + Gold Enamel Top Coat

Net content:Glamours: 25kg/bucket Gold enamel paint: 18/kg bucket

Colour options

solid colours, pre-made colours, can be adjusted according to incoming samples.

Supporting tools:Wool roller, stainless steel batch knife

Pre-treated substrates

- 1、Substrate surface: Remove surface dust, grease and not solid tiles, etc., if there are holes and cracks to be repaired to ensure that the surface of the substrate must be solid, clean, dry and flat
- 2、Ensure that the humidity on the surface of pre-painted substrate is less than 10%, PH value is less than 10
- 3、Roller coating once or twice primer (penetration primer) to water 10-15% use

Base requirements

- ① Suggest using high-quality water-resistant putty powder as leveling material
- ② The base layer should be flat, clean, and have good strength before construction can proceed
- ③ Renovation of old walls: Flatten the base layer, remove loose surface parts, and clean dust, oil stains, and other impurities before construction can begin
- ④ Matching primer: When the putty has slight powder loss, it is recommended to use Vanlei exclusive matching primer after polishing

Implementation standards:GB 18582-2020 GBT 9779-2015

Shelf life:

12 months in dry condition at room temperature (at the time of original shipment)



包装规格 Packaging specification: 25kg/桶 25kg/barrel



耗材标准 Consumable standard :1.2-1.5kg/m²

万磊建筑涂料有限公司

Foshan City Nanhai Wanlei Building Paint CO., LTD



广东生产基地（代码FS）

广东省佛山市南海区松岗万石工业区

广州分公司

广州市荔湾区羊城装饰材料市场172号

广西生产基地（代码QT）

广西壮族自治区贵港市覃塘区产业园甘化园区

南宁分公司

广西壮族自治区南宁市兴宁区快环建材市场

注意

公司根据产品技术和发展需要, 有权对产品配方进行更新升级, 而不对外另行公布, 请以最新样板册颜色为准, 不便之处, 敬请原谅!

4000-147-187

www.fswanlei.com